

# Product Showcase

HIKVISION®

## 4G

- 2/4 MP, 2.8/4 mm lens
- 0.01 Lux @ F1.6
- Pan: 0° to 345°, Tilt: 0° to 80°
- Two-way audio
- Smart hybrid light
- 30 m IR, 30 m white light
- IP66
- 4G connection



- DS-2DE2C400MWG-E/4G
- DS-2DE2C200MWG-E/4G

## PoE

- 2/4 MP, 2.8/4 mm lens
- 0.01 Lux @ F1.6
- Pan: 0° to 345°, Tilt: 0° to 80°
- Two-way audio
- Smart hybrid light
- 30 m IR, 30 m white light
- IP66
- PoE



- DS-2DE2C400MWG-E
- DS-2DE2C200MWG-E

## Hikvision PT Cameras with Smart Hybrid Light

Budget-Friendly, Performance Plenty

*Just a matter of a turn*



Smart Hybrid Light



**Headquarters**  
No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com



# Budget-Friendly Performance Plenty

**Smart Hybrid Light** with Motion Detection 2.0 offers flexible lighting options

IR Mode



Only IR light is on. The supplemental light is concealed.

White Light Mode



Only white light is on. The camera captures color images.

Smart Mode



When there is no vehicle or person, the camera uses only the IR light. When a target appears, the camera automatically triggers the white light and switches back to the IR light later.

**Pan and tilt,** easy remote adjustment of any angle via Hik-Connect



Boosted performance with **512 GB SD card**



**Two-way audio** enables real-time communication, breaking the limits




Built-in speaker

Built-in mic



**All-in-one bracket** for easy installation

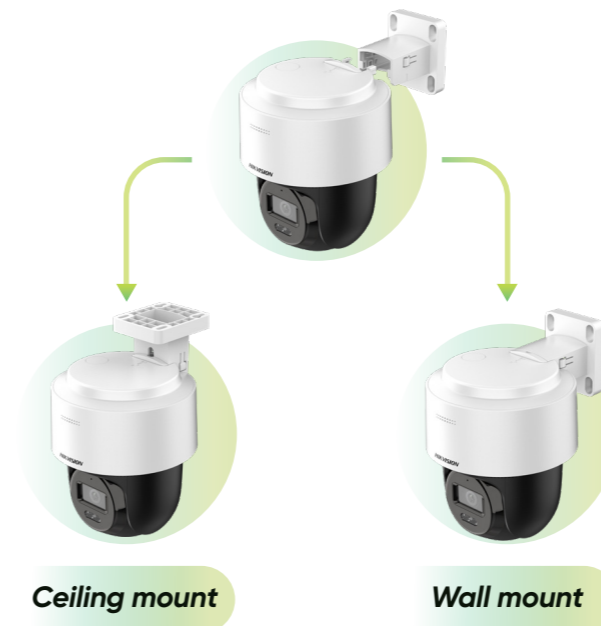

Ceiling mount

Wall mount

The removable bracket supports two ways of installation

**Auto Tracking Lite**

enables the PT camera to pan and tilt so that targets are always in the field of view

